


# Measurement Guide

1. Hold a 24" level plumb and centered to the top of the toe rail.
2. Bump the level up against the boat.
3. Make measurements 1 to 5 horizontal from boat to the inside edge of the level (one will be zero where level touches boat).
4. Make measurement #6 vertical.
5. Shoot this picture.
6. Email your picture and the 6 measurements to: [info@scandiamarineproducts.com](mailto:info@scandiamarineproducts.com) with your request. You will receive a price quote. Thank you!

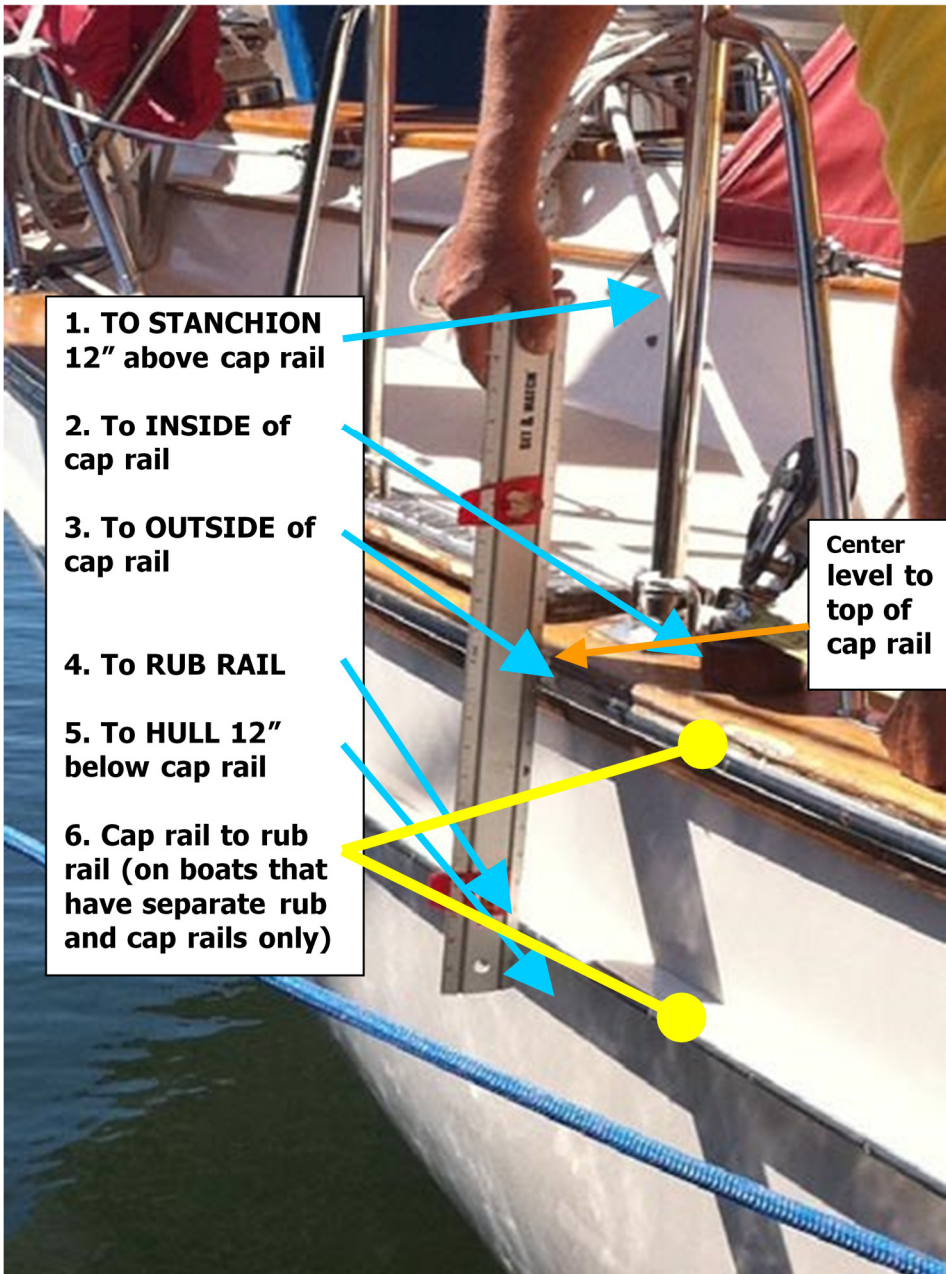

1. TO STANCHION  
12" above cap rail
2. To INSIDE of cap rail
3. To OUTSIDE of cap rail
4. To RUB RAIL
5. To HULL 12" below cap rail
6. Cap rail to rub rail (on boats that have separate rub and cap rails only)

Center level to top of cap rail

1. \_\_\_\_\_  
**Gatemount only**
2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_
5. \_\_\_\_\_  
**One of the above will be zero where level touches boat.**
6. \_\_\_\_\_  
**(optional)**